

Brief Introduction of ZX50 Series IP Phone System

The all-in-one ZX50 series of IP phone system can not only provide the basic features of traditional PBX, but also advanced features such as visual voice mail, music on hold ,and auto attendant, etc. With Zycoo VoIP solutions, SMEs can take advantage of the VoIP services and quickly deploy VoIP networks to connect with multiple branch locations over the Internet without any change on the current equipment or dial plan.



ZX50-A4



ZX50-A8



ZX50-AG42



ZX50-G4




ZX50-B4




ZX50-AE41

ZYCOO ZX50 Series IP phone system product lines include **ZX50-A4**, **ZX50-A8**, **ZX50-AG42**, **ZX50-G4**, **ZX50-B4**, **ZX50-AE41**, which has different interface in the following table.

	Model	FXS	FXO	GSM	E1	BRI
ZX50-A4	A404		4			
	A422	2	2			
ZX50-A8	A808		8			
	A826	2	6			
ZX50-AG42	AG4204		4	2		
	AG4222	2	2	2		
ZX50-G4	G4			4		
ZX50-B4	B4					4
ZX50-AE41	AE4104		4		1	
	AE4122	2	2		1	

Key Features	<p>30 Concurrent calls</p> <p>Up to 100 registers</p> <p>Video Calls</p> <p>Multiple Language</p> <p>DID(Direct Inward Dialing Number)</p> <p>Support SKYPE for SIP</p> <p>Support USB disk recording(Scalable)</p> <p>Call Monitoring</p>
Basic Features	<p>Codec: G.711-Ulaw,G.711-Alaw,G.726,G.729</p> <p>GSM,SPEEX,H.261,H.263,H.263+,H.264</p> <p>Call Hold/Forward/Transfer/Waiting/Parking</p> <p>Call Paging and Intercom</p> <p>Caller ID</p> <p>Call Queue</p> <p>Black List</p> <p>Phone Book</p> <p>Music On Hold</p> <p>DISA(Direct Inward System Access)</p> <p>Flexible Dial Plan</p> <p>Ring Group</p> <p>Conference Room</p> <p>Call Logs</p> <p>BLF(Busy Lamp Field)</p> <p>Configuration By web</p> <p>Built-in SIP/IAX2 server</p> <p>Build-in voice mail server</p> <p>System Backup and Restore</p> <p>Echo Cancelation/VAD</p> <p>Support Static/DHCP/PPPOE</p> <p>VPN Client(Support N2N)</p> <p>DDNS Client(Support Dyndns.org)</p> <p>Support NTP(Network Time Protocol)</p>
Hardware	<p>32 bit embedded RISC DSP</p> <p>1G Onboard Nand Flash</p> <p>128M SDRAM</p>
Package size	L: 368mm × W: 240mm × H: 82mm
Certificate	
Environmental requirements	<p>Temperature: -10°C-45°C</p> <p>Storage temperature: -30°C-65°C</p> <p>Humidity: 10-80% no dew</p> <p>Power: AC100~240V</p>

SOHO or Small and medium businesses

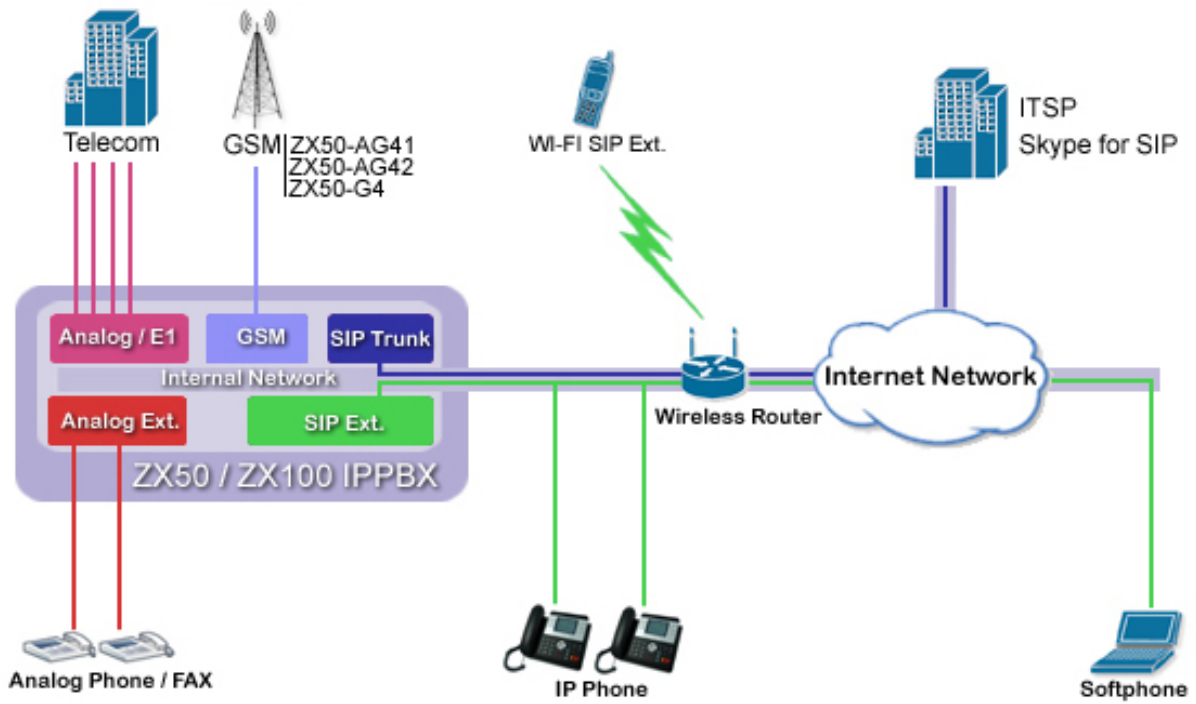

Multiple Site

